KGP

CC15W100-700 DALI NFC

Constant Current Dimmable Driver

Model:CC15W100-700 DALI NFC



Model	Item Code	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency	Output Voltage	No load Voltage
CC15W100-700 DALI NFC	122431	100-700mA	≤0.11A	17.2W	0.25-15.00W	≥ 0.93	87%	2.5-46Vdc	60Vdc

*** Test result @230V, 50Hz, Full Load**

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Current
	Dimming Type	Amplitude (DALI-2)
	Output current setting	Near field communication (NFC)
	Output Features	Isolation
	IP Grade	IP20
	Insulation Class	Class II (compatible Class I)
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Range of DC Input Voltage	180-280VDC
	Frequency	0/50/60Hz, Range:0/47-63Hz
	Overvoltage protection	2h@380VAC, 48h@320VAC
	Input Current	≤0.11A max
	Input Power	≤17.2W max
	Power Factor	≥0.93 (230VAC，full load)
	THD	≤11% (230VAC，full load)
	Standby Power Consumption	≤0.45W @230VAC (DALI system DIM to off)
	Inrush Current	≤7.2A/2.6us (230VAC，full load)
	Connected quantity of 10A Breaker Connected quantity of 13A Breaker Connected quantity of 16A Breaker Connected quantity of 20A Breaker	27pcs/type A ; 43pcs/type B ; 69pcs/type C 35pcs/type A; 56pcs/type B ; 90pcs/type C 43pcs/type A; 69pcs/type B ; 111pcs/type C 54pcs/type A; 86pcs/type B ; 138pcs/type C

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

Output	Output Voltage	2.5-46VDC@100-300mA, 2.5-42VDC@350mA, 2.5-37VDC@400mA, 2.5-33VDC@450mA 2.5-30VDC@500mA, 2.5-27VDC@550mA 2.5-25VDC@600mA, 2.5-23VDC@650mA 2.5-21VDC@700mA
	No Load Voltage (Uout)	60VDC Max.
	Output Current	100-700mA (by NFC setting，Factory set current of 100mA)
	Max. Output Power	15.0W
	Efficiency	≥87% (230VAC，full load)
	Output LF current ripple (< 120 Hz)	±3% (Imax-Imin) / (Imax+Imin)
	Current Accuracy	±5%
	Output PstLM (at full load)	≤1
	Output SVM (at full load)	≤0.4
	Starting Time（AC mode）	≤0.8S (230VAC，full load, by DALI system)
	Starting Time（DC mode）	≤0.4S
	Switching over time（AC/DC）	≤0.4S
Control Method	Secondary PUSH dimming	Secondary PUSH dimming (Max. lead wire length：20m,same port of DALI）
	PUSH-button	Max parallel connections qty for Push-dim 15
	DALI function	DALI dimming (Max. lead wire length：300m）logarithm or linear dimming curve selectable
	Dimming range	DALI dimming: 1%-100%
	NFC current setting	The output current can be set within the total value range in 1-mA-steps. Output current is mean value. Setting is by KGP's software APP/APK/PC with FEIG equipment or mobile phone.
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery (not be hot swap)
	No-load Protection	Auto Recovery
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC L/N to PE
	Leakage current	< 700μA, I/P to O/P @230V input
Environment	Ta/Operation Temperature	-20….+50℃
	Ts/Storage Temperature	-20….+85℃
	Tc/Enclosure Temperature	85℃
	Humidity	10%....90%RH
	Atmosphere	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Built -in / Independent
	PRI Wire preparation	0.5-1.5□ / 8-9mm
	SEC Wire preparation	0.5-1.5□ / 8-9mm
	DALI Wire preparation	0.5-1.5□ / 8-9mm

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

	SEC Wire length	0-0.8±0.05m (The EMC test results were achieved at approximately 0.8 meters (the length required by the standard). If there are any data differences, please test according to the length required by the standard)
	Dimension	103.4*30*21mm (L*W*H)
Standards	Certification	CE/ENEC/SAA/UKCA/EAC/CB
	Safety Standards	EN61347-1:2015/A1:2021; EN61347-2-13:2014/A1:2017; EN62384:2006/A1:2009; AS 61347.2.13:2018; AS/NZS61347.1:2016; BS EN61347-1:2015/A1:2021; BS EN61347-2-13:2014/A1:2017; IEC 61347-1:2015+A1:2017; IEC 61347-2-13:2014+A1:2016;
	EMC Standards	AS/NZS CISPR 15:2011; AS CISPR 15:2017 ; BS EN IEC 55015:2019+A11:2020; EN 61547:2009; BS EN IEC 61000-3-2:2019; BS EN 61000-3-3:2013+A1:2019;
	Performance	EN 62384
	DALI Performance	EN 62386-101 (DALI-2) EN 62386-102 (DALI-2) EN 62386-207 (DALI-2, including part 251, 252, 253)
	Surge	L/N-Ground:2kV; L-N:1kV
Others	RoHS	2011/65/EU
	Life Time	50000h Tc=85℃
		75000h Tc=80℃
		100000h Tc=75℃
	Warranty	5years， F.R. < 10000ppm

Remark: 1.All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature.

2.LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.


3.Please make sure Tc under Lifetime condition when long term operate under DC input.

4.DC emergency (DCemDim):Default 15%, EOFx range = 1 .. 100% (EOFx = DCemDIM level)

5.During the PUSH DIM test, the number of parallel connections must be less than 15PCS.

Distance	15m	30m	50m
Cable selection	0.5mm²	0.75mm²	1.0mm²


2. Label

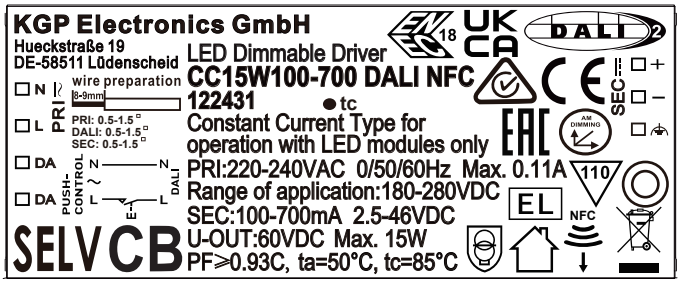

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid


3. Dimension （Unit：mm）

Built in type:

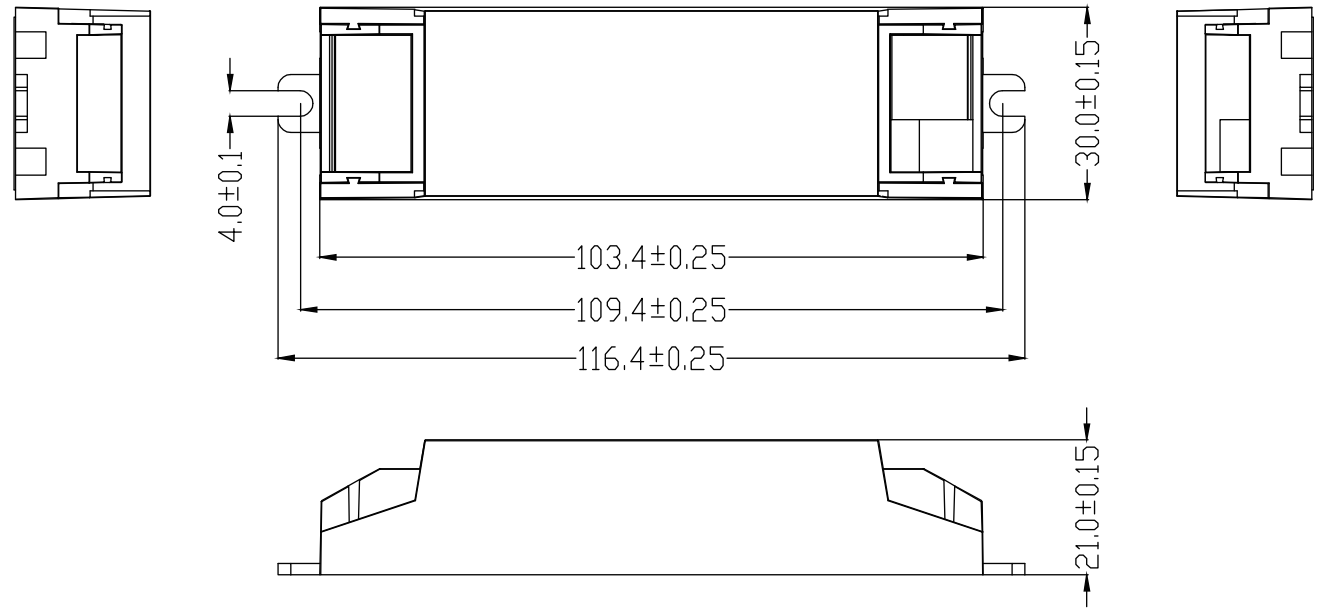


Compatible Small Strain reliefs:SR_CC15-23-36
Compatible Large Strain reliefs:SR_CC15-23-36_5POL

Small Strain reliefs

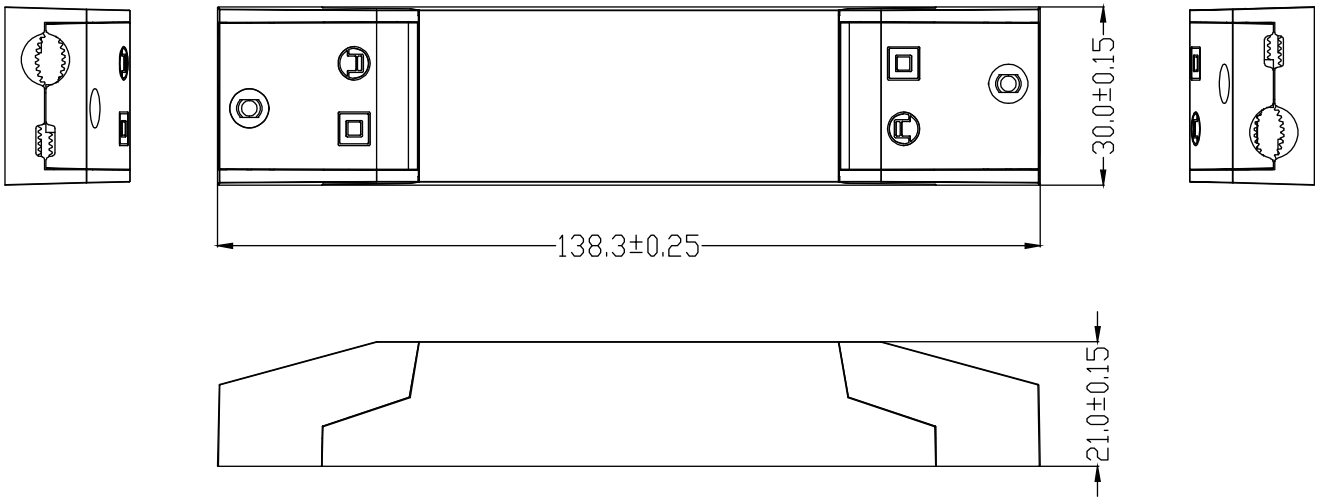


KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

Large Strain reliefs

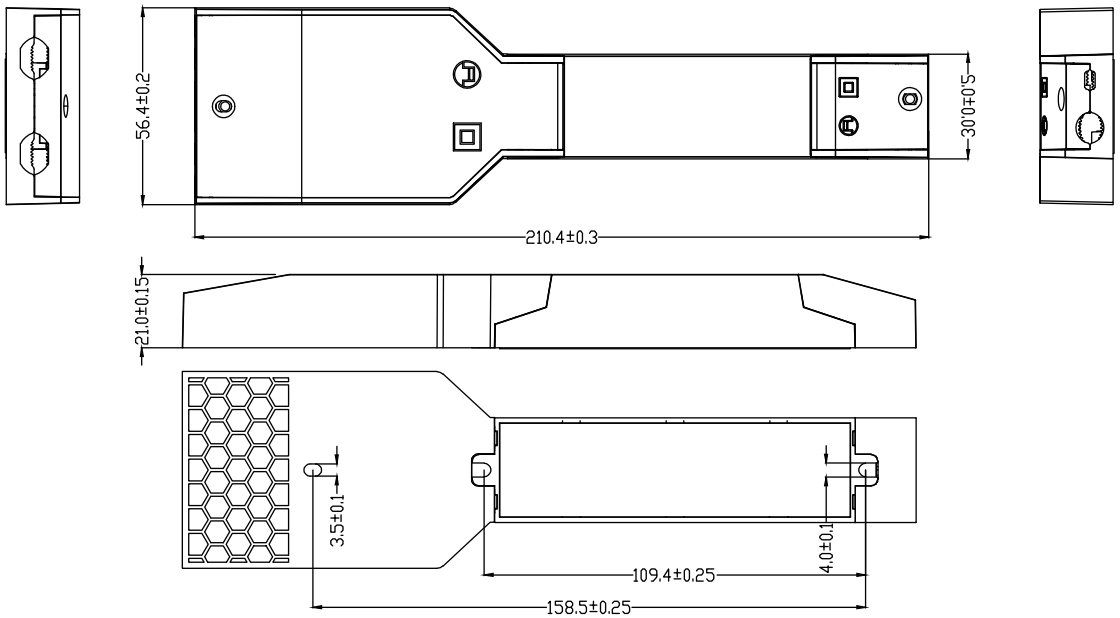

Large Strain reliefs specifications

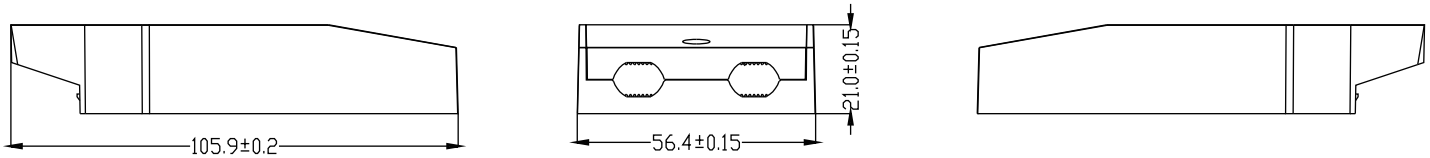

Tolerance for dimensions ± 0.1 mm

Mechanical, Operating & Storage Conditions

Driver cross-section dimensions: 55.4-57.4 x 20.0-22.0 mm

Wire size: 0.5 - 2.5 mm²

Ambient temperature range: -20…+50 °C


Storage temperature range: -20…+85 °C

Assembly temperature range: +5...+30 °C


Do not store in wet or humid environment!


* Unless otherwise stated in the driver datasheet (for independent installation). Note! Tc max temperature of the driver shall not be exceeded.


Terminal




5 - pole connector for DA / CC drivers with LC-SRB-LOOP



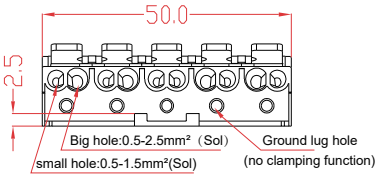







KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

4. Wiring Diagram

Figure: Voltage peaks for LED driver without earthing (Above) and with earthing (Below)

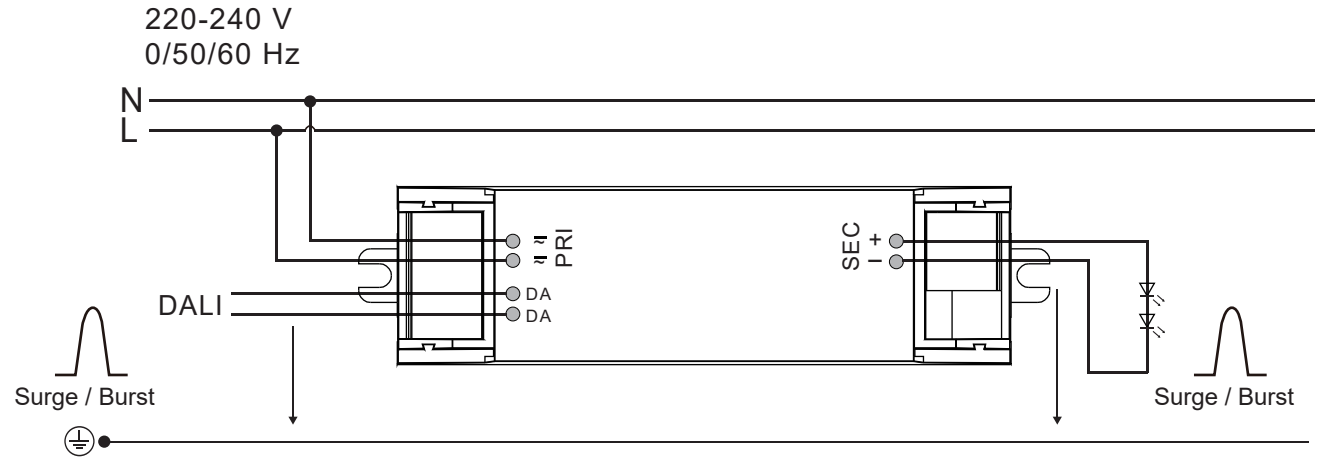


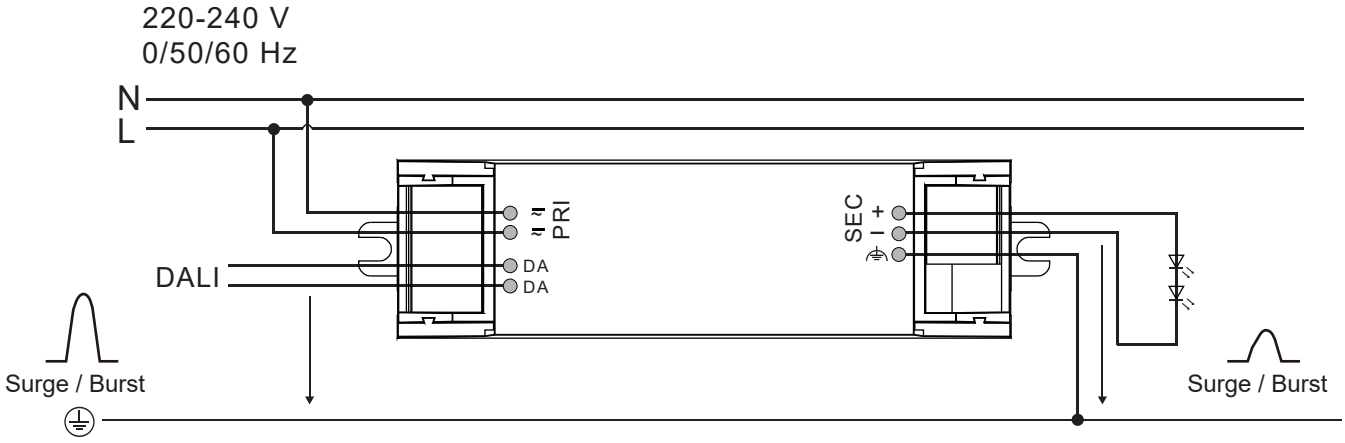


KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

Push Dimming

Figure: Voltage peaks for LED driver without earthing (Above) and with earthing (Below)

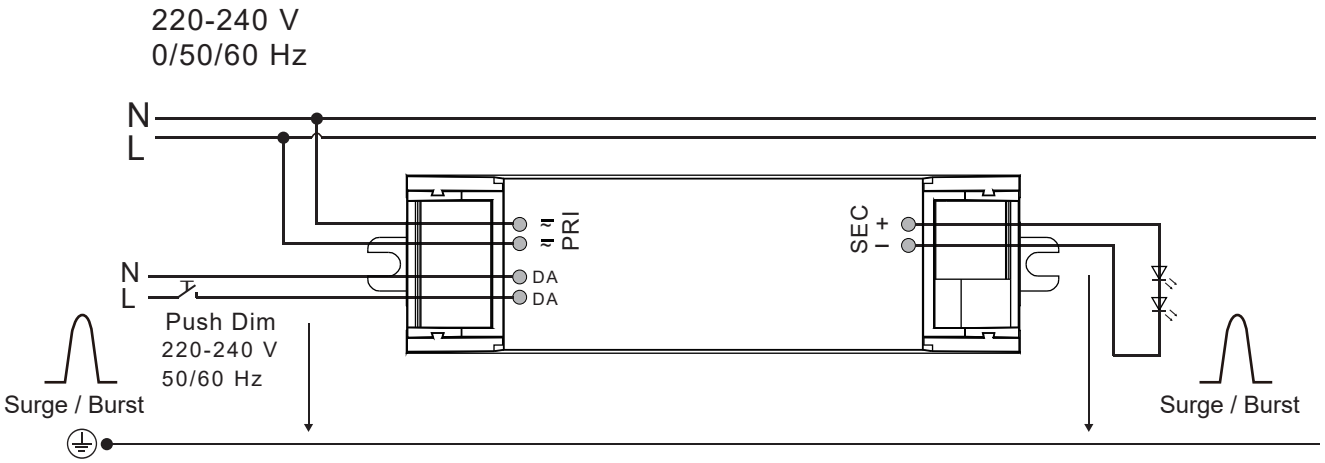


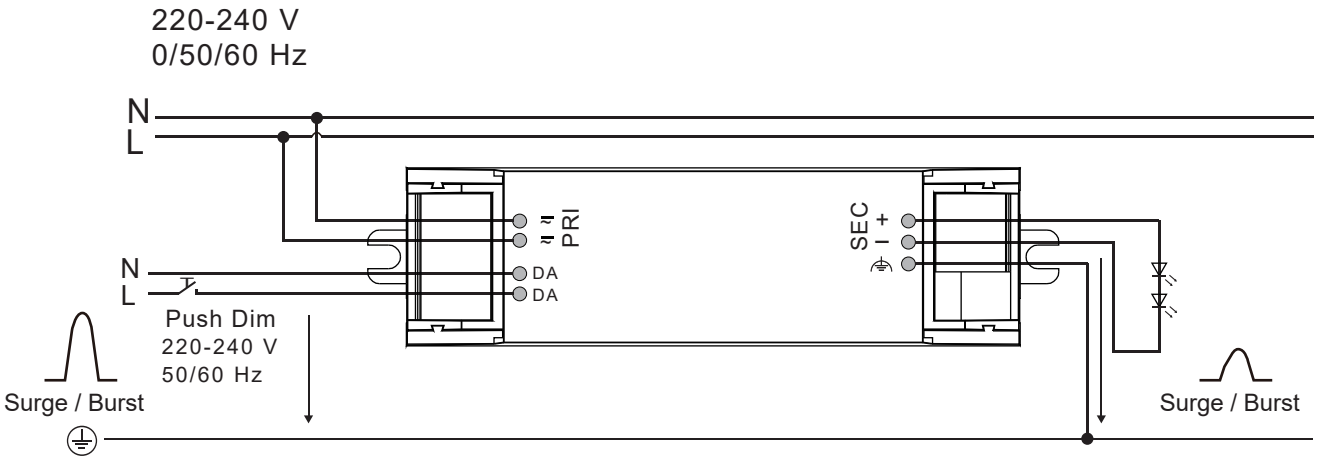


KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

5. Electrical values


1. Operating power windows

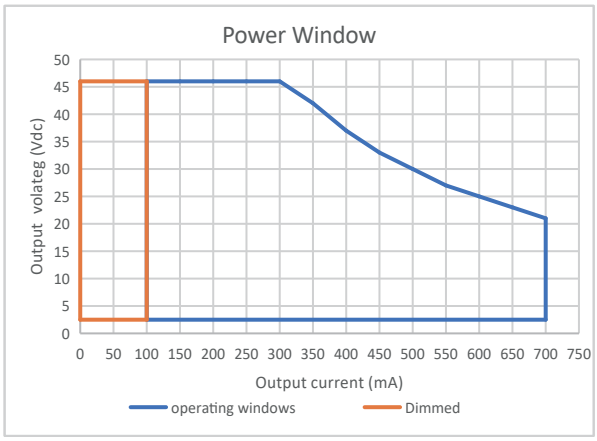


2. Effciency v.s. Load

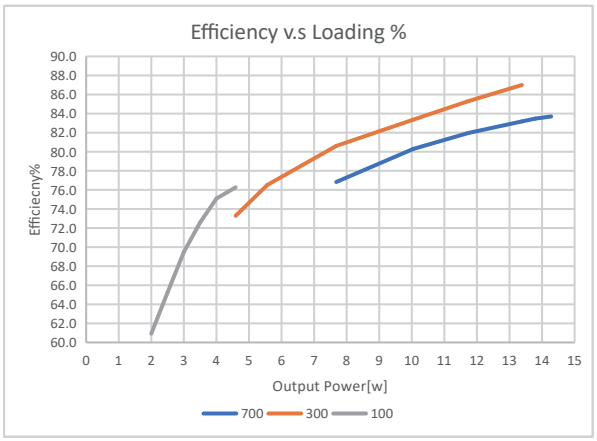


3. PF v.s. Load

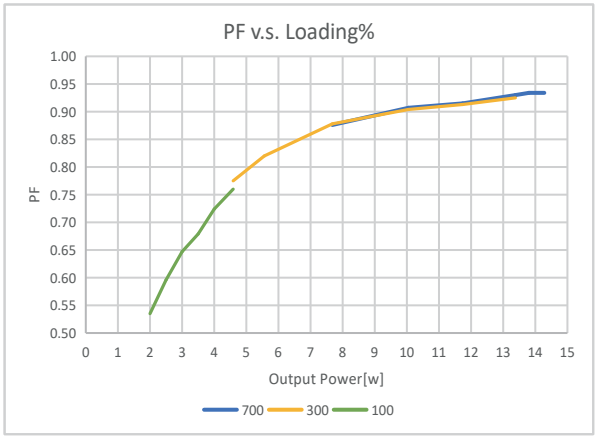


4.THD v.s. Load

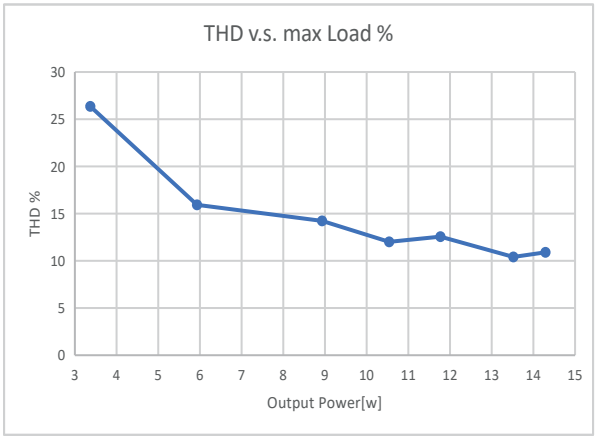

5.Life time

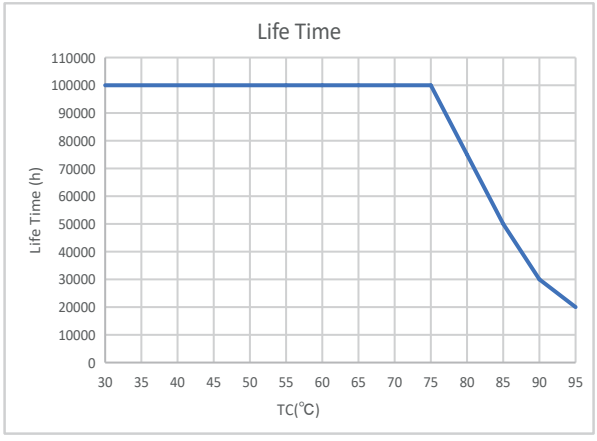

6.Derating

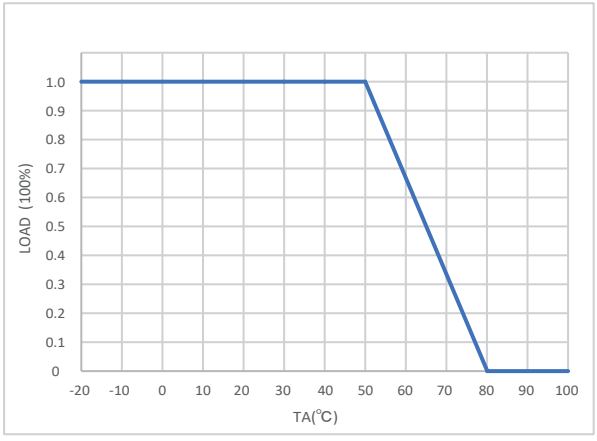

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid


6. DALI dimming curve

formula for DALI dimming.

X(n)=10^{[(n-1)/(253/3)]-1},

Here,n means the target dimming stage of the total 254 stages.

X(n) means the percent of the maximum output current

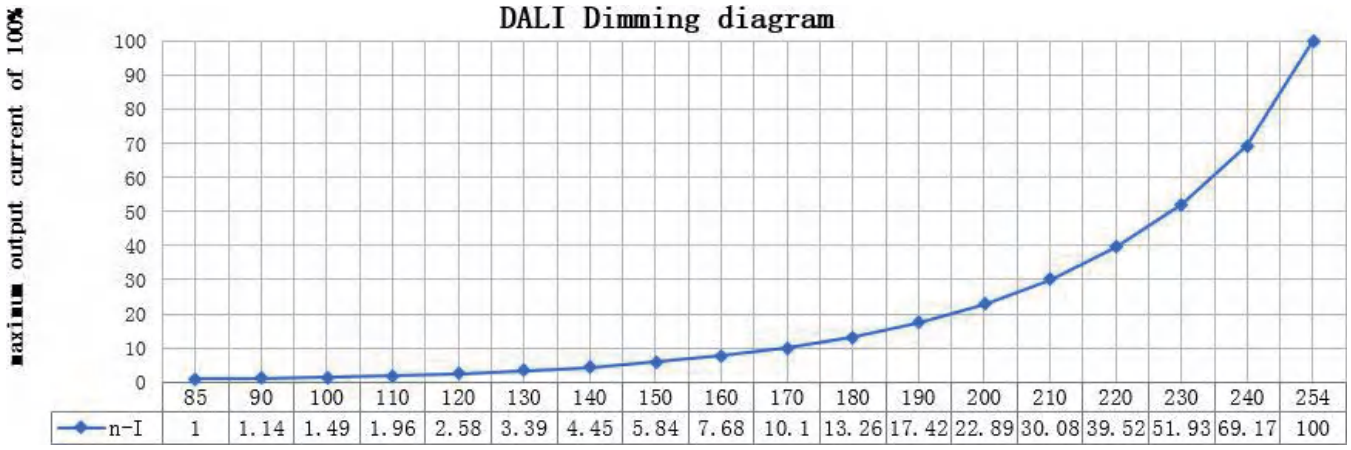

	85	90	100	110	120	130	140	150	160	170	180	190	200	210	220	230	240	254
n-I	1	1.14	1.49	1.96	2.58	3.39	4.45	5.84	7.68	10.1	13.26	17.42	22.89	30.08	39.52	51.93	69.17	100

7. Function of the earth terminal:

The earth connection is conducted as protection earth (PE). The LED Driver can be earthed via earth terminal or metal housing
(if device has metal housing). If the LED Driver will be earthed, protection earth (PE) has to be used. There is no earth connection required for the functionality of the LED Driver. Earth connection is recommended to improve following behaviour.

- Electromagnetic interferences (EMI)
- LED glowing at standby

In general, it is recommended to earth the LED Driver if the LED module is mounted on earthed luminaire parts respectively heat sinks and thereby representing a high capacity against earth.


Avoiding residual LED glow on standby

Residual LED glow on standby may occur as a result of capacitive leakage currents from the LED module onto earthed luminaire parts (such as the heat sink). This mainly affects high-efficiency LED systems with large surface areas installed in luminaires with protection class 1.

The topology has been improved so that residual LED glow can be virtually eliminated by earthing the devices.

8. Packing information

Built in type

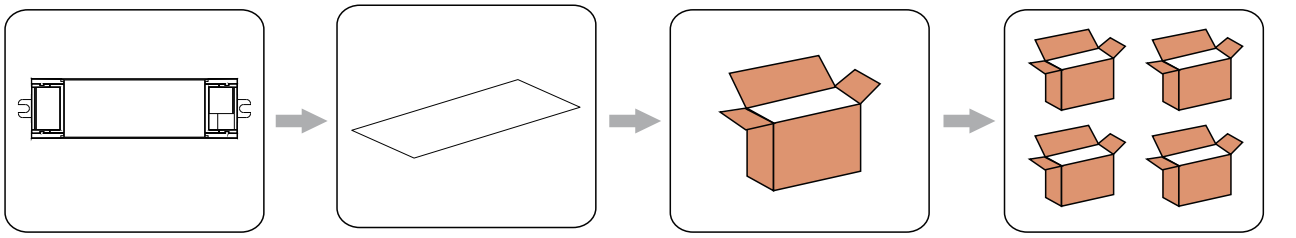

Product | paper partitions linerboard /Plastic paper | 20per small box | 20sets/box*4boxs=80pcs/Carton


Inner box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
223*126*73	20	0.076	1.51	1.60

Outer box

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
270*235*170	80	0.076	6.08	6.69

Small Strain reliefs

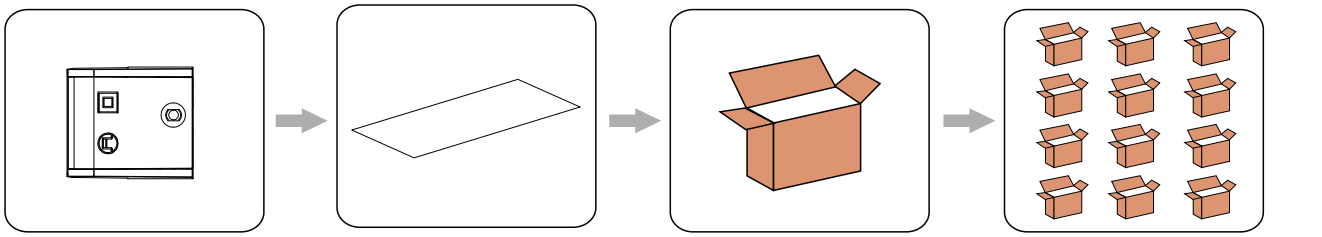


Product | paper partitions linerboard /Plastic paper | 50 per small box | 50sets/box*12boxs=600pcs/Carton

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
500*195*245	600	0.007	4.26	5.56

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

Large Strain reliefs

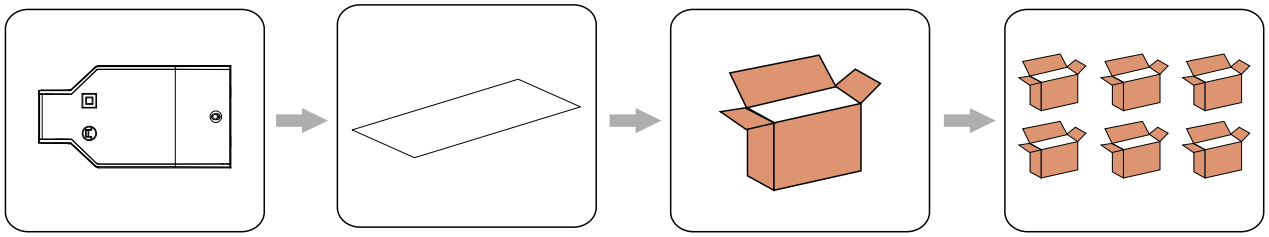

Product | paper partitions linerboard /Plastic paper | 50 per small box | 50sets/box*6boxs=300pcs/Carton

Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
375*315*385	300	0.041	12.34	13.9

9. Ordering Data

Model No.	Item Code
CC15W100-700 DALI NFC	122431
SR_CC_15-23-36	147841
SR_CC_15-23-36_5POL	147851


10. NFC current setting:

NFC Reader (optional)

Feature:

Easily on-line read a output current from a driver or write a new current data to a driver throughout KGP NFC reader within few seconds.



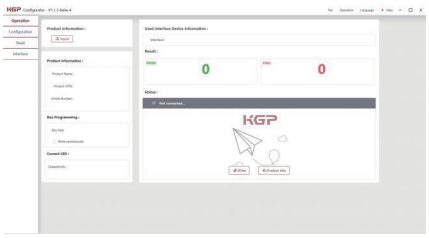

Product	Description	Interface	Matching antenna	Zhaga approval	Usage
ID CPR30+ 	Desktop programmer	USB	Integrated	Yes	Single Programming on Desktop
ID ISC.PRH101-USB 	Handheld programmer	USB	Integrated	Yes	Single Programming by Handheld
ID ISC.MR102-USB 	Middle range programmer，for connecting external antenna	USB	RF-MANT12786 	Yes	Single Programming on Product line
ID ISC.LR1002-E 	Long range programmer，for connecting external antenna	USB,RS232,TCP/IP	ID ISC.ANT310/310 	Yes	Multi Programming System

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

APP NFC

Feature:
Quickly check output current of a LED driver simply via iPhone smart phone, as well as, correct or setup a new current data immediately with no extra equipment at any job site.

iPhone

ICON


Main



Download method

1.Scan the QR code to download

2.On your iPhone, search for KGP NFC in APP Store to download it




iPhone smartphones with NFC can be downloaded and used directly

Android

ICON

Main

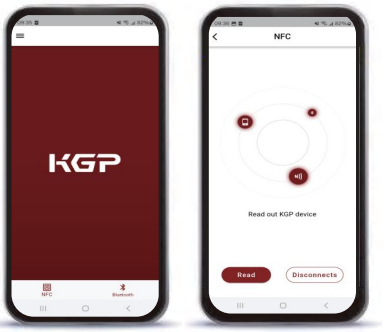

Download method

1.Scan the QR code to download

Android smartphones with NFC can be downloaded and used directly

An iPhone/Android smartphone without NFC requires the following devices to use it

Product	Description	Interface	Matching antenna	Zhaga approval	Usage
ID ECCO Smart HF-BLE 	Handheld wireless programmer	USB,Bluetooth LE V4.2 & V5.0	Integrated	Yes	Handheld programming, installation and maintenance work

11. Push Dim :

10.1 On / off:

Short push (120ms-600ms) on the switch
Stepless dimming: long push (> 0.6sec) on the switch

KGP Electronics GmbH
Hueckstraße 19
DE-58511 Lüdenscheid

11.2 Power-on memory function

When the LED driver is powered on, it will restore the memory before the LED driver is poweredoff. (brightness remembers the brightness after the last dimming is stable, and the bright ness during dimming is not memorized)

11.3 Light on/off

If the light is on, the light will be off after a short press. If the light is off, the light will be on after a short press. The time range of short press is 120-600mS.

11.4 PUSH Dimming

Press and hold the push switch for a long time, the light will enter the dimming state, if the previous time is dimming, it will automatically turn to dimming the next time.After releasing the reset button, the dimming stops and the current illuminance is maintained. The dimming range is 1%-100%. The default is to dim when the power is first long-press. If the brightness of the power-onis the maximum brightness, the first long-press is to dim. (Long press 0.6-3S to start dimming.)

11.5 Forced synchronization

Long press for 10 seconds to turn on all the lights and turn on the same brightness (50%), and continue to quickly short press will not change. After a short period of time without short press operation, the module exits the synchronization mode, and the short press restores the switch function.

11.6 PUSH Dimming rate

Long press the push switch 10S to switch the dimming rate to 3S, Long press the push switch 20S to switch the dimming rate to 6S.

12. REVISION HISTORY

Date	Revision	Remark
2024.04.15	V0.01	Label, Packing information, Electrical values, Dimension, update images
2024.09.15	V0.02	Label, Packing information, Parameters, Dimension, update images
2024.12.02	V0.03	Label, Parameters, Electrical values, Packing information, update images
2025.01.17	V0.04	Label, NFC current setting, update images
2025.02.10	V0.05	Packing information, Dimming Type
2025.07.14	V0.06	Parameters（SEC Wire length）,Ordering Data